

### General description

- Classical model cabinet for network cabling .
- Front and rear doors are optional(Tempered glass door, single or double vented door ,steel door or others).
- Removable side panel with latches, easy installation( optional lock).
- Excellent air ventilation design with optional cooling fans.
- Cable entrance on the top and bottom for cable management.
- 4 PCS mounting profile with U number, easy to adjustable on mounting rail.
- Maximum static loading capacity could be 800 kg.
- Perfect solution for any 19-inch standard installation.
- Adjustable feet and castors are available simultaneously.
- Flat package, save the container space, easy to transport.
- Various accessories for option.

### Standard

Comply with IEC60297-3 , CE-EMC, CE-LVD , RHOS,TUV , ISO-9001 standard

### Material

All metal are high-quality SPCC Cold Rolled Steel

**Thickness:**

Tempered glass:5 mm

Steel:Mounting profiles are 2.0 mm, others are 1.2 mm

### Degree of protection

IP20

### Surface Finish

Degreasing, pickling, phosphoric, powder coated, static powdered by WAGNER advanced painting equipment and system , let the cabinet with fine wrinkle soft touch paint



## Color

Product range attracts the attention with the mostly environmentally fit and selected color of RAL 7035(Light Grey),RAL9004/RAL9005(Black)

## Size

- Height: 18 U- 47 U -Width: 600 mm/800 mm
- Depth: 600 mm, 800 mm, 900 mm, 1000 mm, 1100 mm, 1200 mm Could be Customized

## Standard accessories

- 1 PC top and bottom
- 1 PC front door with lock - 1 PC rear door with lock
- 2 PCS removable side panel with latches - 4 PCS mounting profile
- 1 set fan tray with 4 fans
- 25 sets cage&nuts
- 4 PCS castor , 4 PCS M10 adjustable feet

## Optional accessories


Fan, cable management,shelf,blank panel, power distribution unit, etc.

## Package

Disassembled packing. 3 Cartons for 1 set cabinet. Could be Customized

- |                   |                        |
|-------------------|------------------------|
| <b>CTN 1:</b>     | <b>CTN 2:</b>          |
| • Front door(14)  | • Frames(12)           |
| • Rear door(1)    | • Mounting profiles(4) |
| • Side panels(11) |                        |
| • Cable tray(4)   |                        |

- |                       |                        |
|-----------------------|------------------------|
| <b>CTN 3:</b>         | • Blank panel(5)       |
| • Top cover(10)       | • cable entry panel(9) |
| • Bottom(7)           | • Fixed shelf(15)      |
| • Fan tray(3)         | • other accessories.   |
| • Mounting angle(6)   |                        |
| • Castors(8)          |                        |
| • Adjustable feet(16) |                        |
| • Spacer(2)           |                        |

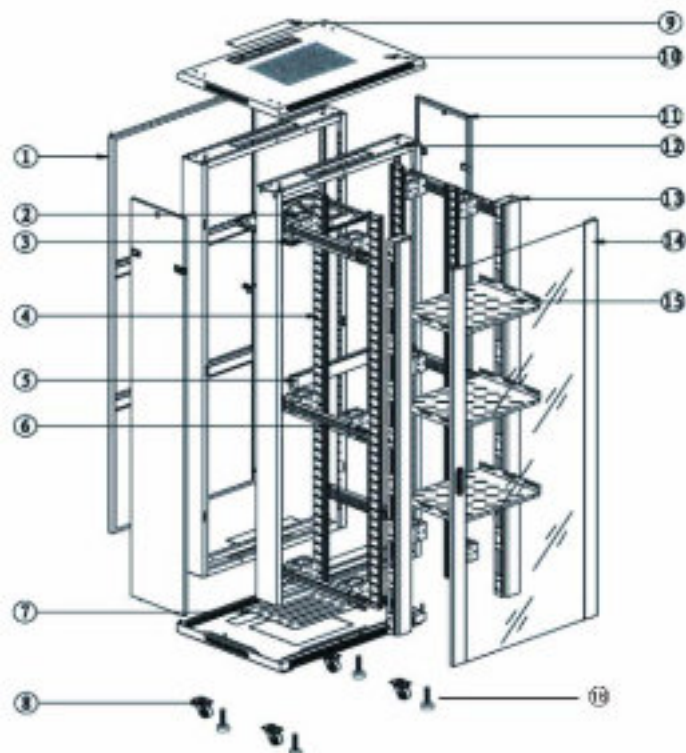

## Flaax Network Cabinet

Size	Width/mm	Depth/mm	height/mm
22U	600	600	1166
22U	600	1000	1166
32U	600	800	1610
32U	800	1000	1610
42U	800	800	2055
42U	800	1000	2055

## Network cabinets ordering table

Cabinet Type		Height		-	Width		Depth		Front Door/Rear Door	
	Code		Code			Code		Code		Code
Wallmount	W	4U,9U,12U,18U	4,9,12,18	-	600	60	450,600	45,60	Single Glass door	G
Floor standing	F	22U,32U,42U	22,32,42		600,800	60,80	600,800,1000	60,80,10	Single Perforated Door	P
Server Rack	S	22U,32U,42U	22,32,42		600,800	60,80	600,800,1000	60,80,10	Single Metal Door	M
Outdoor	O	9U,18U	9,18		600	60	450,600	45,60	Split Glass door	SG
									Split Perforated Door	SP
									Split Metal Door	SM
SKU example: 22U Floor standing cabinet, 600 x 450 With single Glass Front Door/ Single Rear Metal Door									F22-6045-GM	